


PLAN VIEW

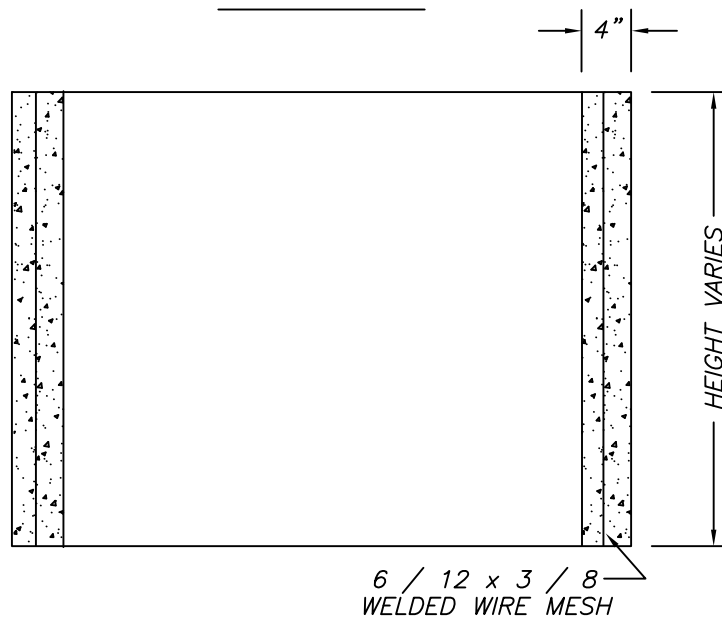

SECTION

CONCRETE TO TEST 4000 PSI @ 28 DAYS
WELDED WIRE MESH ASTM A-185

SPECIFICATIONS			
RING HEIGHT	VOLUME C. F.	VOLUME GALLONS	APPROX. WEIGHT
2'-0"	202	1,509	3,650
3'-0"	303	2,263	5,475
4'-0"	403	3,017	7,300
5'-0"	504	3,771	9,125
6'-0"	605	4,525	10,950

Precast Concrete Sales Co. 123 Route 303 Valley Cottage, N.Y. 10989 Tel. (845) 268-4949 - Fax (845) 268-4376		
CONT.		
JOB		
12'-0" DIA. SOLID RING		
DATE	DRAWN BY	DRAWING NO.
1/16	CLASSIC DESIGN	712-S