


ELEVATION

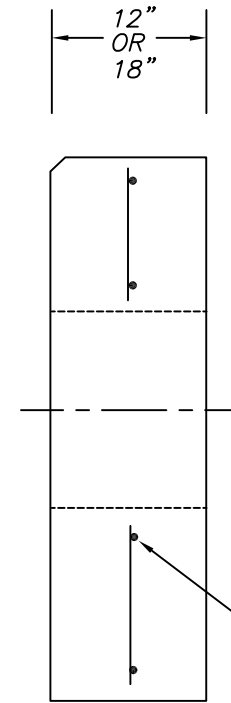

FOR 12" WALL
NO. 4 BARS
AT 12" O.C.E.W.

FOR 18" WALL
2 ROWS OF
NO. 4 BARS
AT 12" O.C.E.W.

SECTION

DIMENSION SCHEDULE					
PIPE DIA.	A	B	C	D	APPROX. WEIGHT
12"	48"	60"	24"	36"	3,000 LBS.
15"	84"	72"	42"	37.5"	6,300 LBS.
18"	84"	72"	42"	39"	6,300 LBS.
21"	120"	84"	60"	40.5"	10,500 LBS.
24"	120"	84"	60"	42"	10,500 LBS.
27"	120"	84"	60"	43.5"	10,500 LBS.
30"	120"	84"	60"	45"	10,500 LBS.
36"	192"	96"	96"	48"	19,200 LBS.
42"	192"	96"	96"	51"	19,200 LBS.
48"	192"	96"	96"	54"	19,200 LBS.
SPECIAL SIZES NOT LISTED CAN BE MFG. UPON REQUEST					

NOTES :
 * 1" CHAMFER ON EXPOSED EDGES
 * CONCRETE TO TEST 4000 PSI
 @ 28 DAYS

Precast Concrete Sales Co.
 123 Route 303 Valley Cottage , N.Y. 10989
 Tel. (845) 268-4949 - Fax (845) 268-4376

CONT.		
JOB		
<i>STRAIGHT HEADWALL</i>		
DATE	DRAWN BY	DRAWING NO.
1/16	CLASSIC DESIGN	9-2